
Mobile Low Level Silo's

Danfords supply a range of Mobile Low Level Horizontal Silos suitable for storing bulk powder material such as cement, pfa or lime in capacities from 20 tons to 100 tons, alternatively we do design silos to suit customer's specification.



Our silos have roof mounted WAM Reverse Jet air filters to allow the cement to dust to be recycled, 180 degree slewing auger to allow easy positioning of the silo in confined spaces including slewing and adjustable height control loading legs for the quick easy loading and transportation of the Low Level Cement Silo.




The advantage to our Mobile Low Level Silos is having slewing transportable legs and removable





All of our silos have a wide range of accessories including weigh batch systems for batching required dosage quantities, digital weigh display for weight measurement, belly mounted water tanks with water pump and flow metre, side mounted vibrators and cable remote operation control.

Our Silos are designed to a very high standard and meet all current CE Certification QSRMC, HSE and EPA requirements.

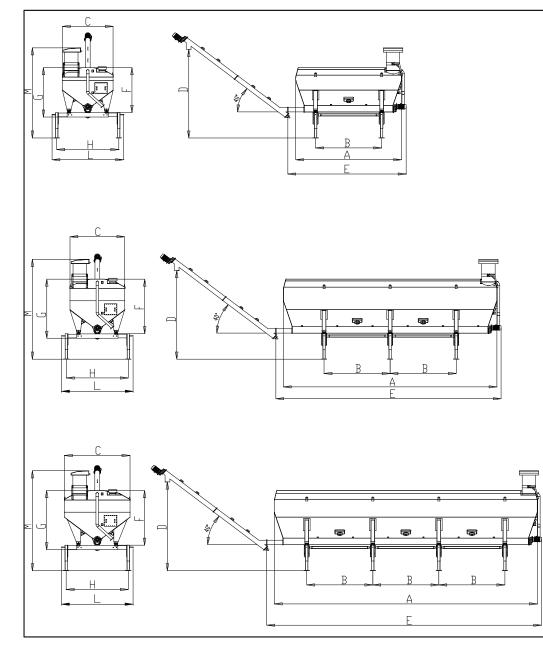

| OR464697003000249244851023427632992281632505053OR5656117003000249244851223427632992281632505053OR6666119503000298044851248427632992281632505053 | Model | Volum (m3) | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | L (mm) | M (mm) |
|---|-------|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| OR36367600300024924485813427632992281632505053OR464697003000249244851023427632992281632505053OR5656117003000249244851223427632992281632505053OR6666119503000298044851248427632992281632505053 | OR1 | 5 16 | 4810 | 3000 | 2300 | 4485 | 5370 | 2271 | 2500 | 2816 | 3250 | 4561 |
| OR464697003000249244851023427632992281632505053OR5656117003000249244851223427632992281632505053OR6666119503000298044851248427632992281632505053 | OR2 | 5 26 | 7506 | 3000 | 2300 | 4485 | 8070 | 2271 | 2500 | 2816 | 3250 | 4561 |
| OR56 56 11700 3000 2492 4485 12234 2763 2992 2816 3250 5053 OR66 66 11950 3000 2980 4485 12484 2763 2992 2816 3250 5053 | OR3 | 5 36 | 7600 | 3000 | 2492 | 4485 | 8134 | 2763 | 2992 | 2816 | 3250 | 5053 |
| OR66 66 11950 3000 2980 4485 12484 2763 2992 2816 3250 5053 | OR4 | 5 46 | 9700 | 3000 | 2492 | 4485 | 10234 | 2763 | 2992 | 2816 | 3250 | 5053 |
| | OR5 | 5 56 | 11700 | 3000 | 2492 | 4485 | 12234 | 2763 | 2992 | 2816 | 3250 | 5053 |
| | OR6 | 66 | 11950 | 3000 | 2980 | 4485 | 12484 | 2763 | 2992 | 2816 | 3250 | 5053 |
| | OR7 | 5 76 | 13750 | 3000 | 2980 | 4485 | 14284 | 2763 | 2992 | 2816 | 3250 | 5053 |

TECHNICAL DETAILS OF EASY-SILO, MODEL (OR)

>structure built in carbon steel

>support structure with telescopic legs

>extraing screw diam. 219mm complete with gearmotor

>screw conveyors for truck loading

>loading pipe with silo safety system

>anti-dust extraction filter

>vibrators or aeration kit

>weigh load cells

>pressure relief valve

>low level indicator

>max level indicator

>control box with start/stop control - weigh display computer - level warning>CE certification

danfordsltd.com

Danfords Ltd Folly Farm Eardisland Herefordshire HR6 9BS Tel: 01544 388930 Mobile: 07799 418720 Fax: 01544 388926

Email: info@danfordsltd.com

VAT No 102486931. Company Registration No 7316074