

# FAST 2000/I330 PISA

## Direct contacts:

	+39 335 715 67 77
	+39 335 732 09 49
	+39 335 715 19 19
	+39 335 679 27 71
	+39 342 543 93 31
	+49 172 463 27 00

[sales@euromecc.com](mailto:sales@euromecc.com)

- Mobile series plant -



- ✓ Fast installation
- ✓ Modular and pre-cabled units
- ✓ Minimal foundation works
- ✓ Simple and intuitive management




[www.euromecc.com](http://www.euromecc.com)




# EASY AND FAST TO ASSEMBLE...

**Fast 2000/1330 Pisa** had been designed to meet growing needs of reducing assembling timing at the site. This is the ideal mobile plant for construction companies asking for a high-performance level of the plant, but above all high-quality concrete level. The batching plant is constituted by two units – aggregate bins and mixing group - pre-assembled and pre-cabled, allowing to rapidly pass from transport configuration to the working one. It is transportable on n.2 open top 40' containers or on n.2 lowering bed trailers. Fast 2000/1330 Pisa has a MEB twin-shaft mixer with 1,33 m³ concrete output per cycle, designed and produced in Euromecc factory, result of more than 40 years of experience in concrete field.

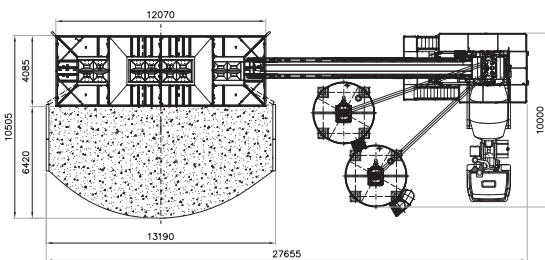


Plant View

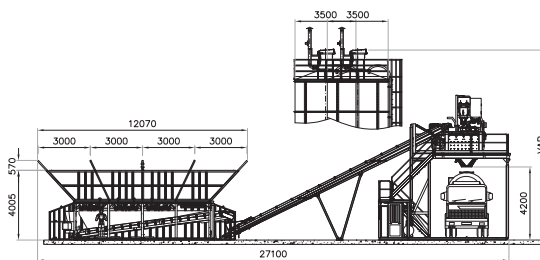

Frontal View

- Minimal foundation works
- Possibility of moving the plant from one site to another
- Low maintenance costs
- Saving of space with integrated control cabin
- Pre-cabled and pre-assembled at the workshop
- Speed of assembling in site
- Easy and cheap transport

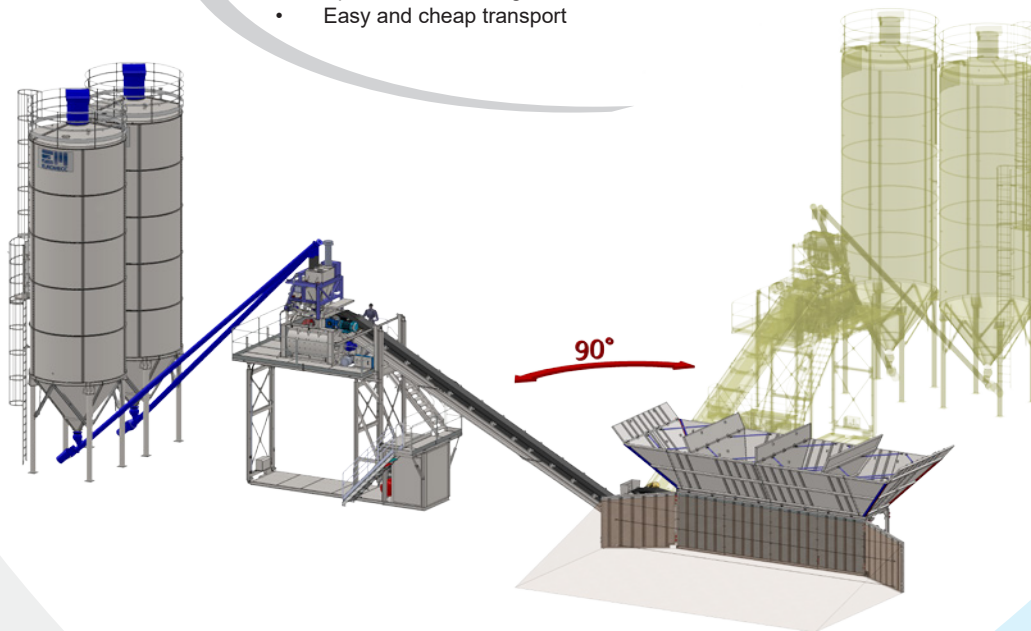

3d model View



Transport: 2 containers open top 40' or 2 standard truck dim 13,6 m x 2,5 m (silos not included)

TECHNICAL FEATURES	UM	FAST 2000/1330	OPTIONAL	MANAGEMENT
Theoretical hourly output	m³/h	60*		
Aggregate storage	m³	48 + 65		
Aggregate storage bins	n°	4		
Discharge gates/Pneumatic	n°	8/8		
Aggregate weighing hopper	m³	3		
Aggregate weighing system	kg	3000		
Cement weighing hopper	m³	0,6		
Cement weighing system	kg	1000		
Water weighing hopper	L	340		
Extractor belt with 650 mm sheet	m³/h	350		
Loading belt with 800 mm sheet	m³/h	350		
Twin shaft mixer	L	2000/1330		
Air compressor	L	270		
Operating voltage	V	400		
Operating frequency	Hz	50/60		
Absorbed electrical power	hp/kW	134/100		
Installed electrical power	hp/kW	164/122**		

\* mixing time 30"; unloading time 25"

\*\* basic version and for n.2 silos

All information and data shall be deemed purely indicative

On customer's request, Euromecc provides a range of accessories to complete the plant. In particular Fast 2000/1330 Pisa can be equipped with the following accessories:

1. Centralized greasing system
2. Washing system for the woven-wire
3. Washing system for mixer
4. Microwave probes
5. Stainless steel additives dosing system
6. Dust filtering system
7. Air-conditioned control cabin
8. Automation on PC
9. Winter or Summer configuration
10. Bulkheads for the loading ramp
11. Complete galvanization of the plant



The management of the plant is done through a control system which manages, automatically, the whole production cycle through a software easy, intuitive and completely adaptable to the user. The PC program can be provided in the main languages. The management system is equipped with all the parameters and functions in order to satisfy all customer's requirements and to improve the plant performance. The operation of the plant is represented with a coloured graphic on the monitor, also indicating all managed components.



www.euromecc.com