

# FAST 5000/3330 VENEZIA

- Mobile series plant -

**Sales Managers:**

-  +39 335 715 67 77
-  +39 335 732 09 49
-  +39 335 715 19 19
-  +39 335 679 27 71
-  +39 342 543 93 31
-  +49 172 463 27 00

[sales@euromecc.com](mailto:sales@euromecc.com)




- ✓ Fast installation
- ✓ Modular and pre-cabled units
- ✓ Minimal foundation works
- ✓ Simple and intuitive management




[www.euromecc.com](http://www.euromecc.com)

# EASY AND FAST TO ASSEMBLE...

**Fast 5000/3330 Venezia** is able to guarantee an hourly output of 130 m<sup>3</sup>/h of high quality concrete. Its structure allows easy transportation without special permissions and minimal installation timing. The whole unit is transported on 3 trailers, two of which low-bed, while for silos, completing components and accessories on request, additional transports are necessary. The plant is equipped with integral insulated cover for the mixing group and the belt that feeds the mixer. The particular design and the modularity of these two groups enable them to be eventually installed on pre-existing aggregate storage units.

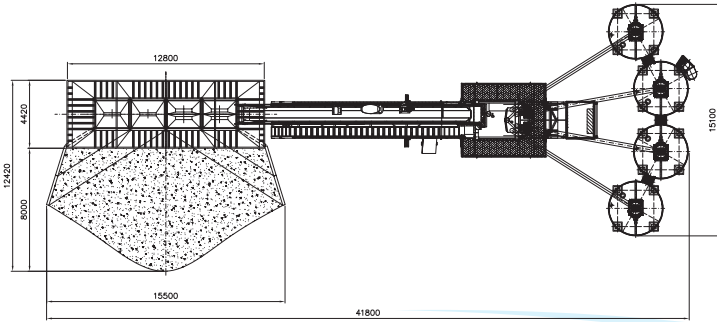


Plant View

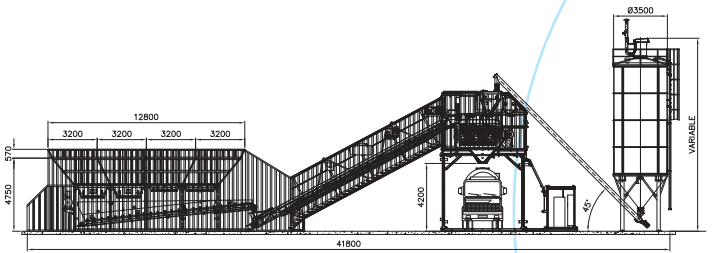

Frontal View

- Minimal foundation works
- Possibility of moving the plant from one site to another
- Low maintenance costs
- Saving of space with integrated control cabin
- Pre-cabled and pre-assembled at the workshop
- Speed of assembling in site
- Easy and cheap transport

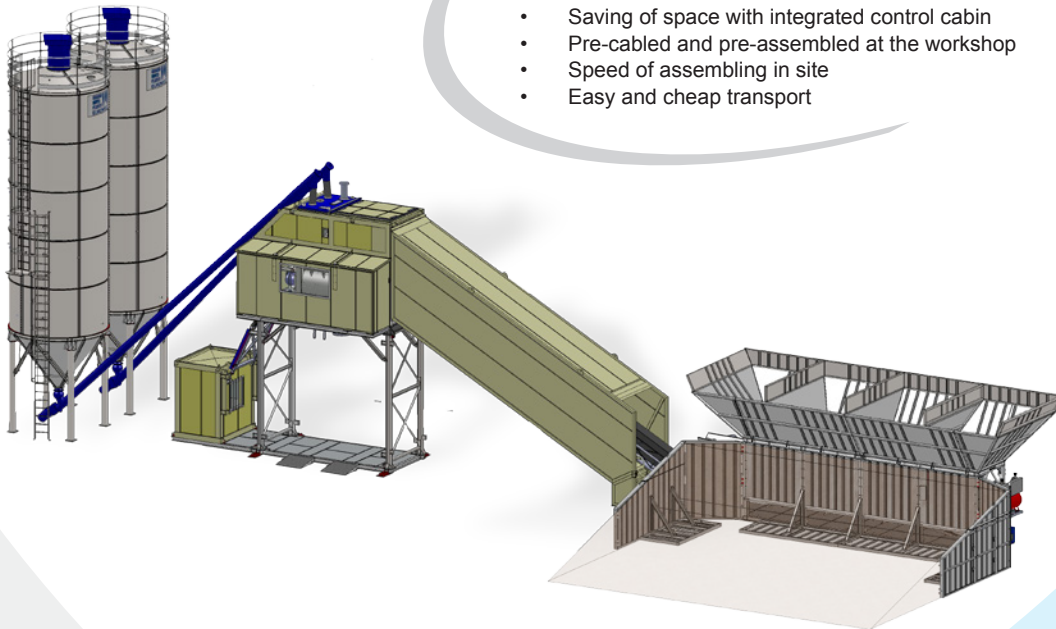



3d model View

Transport: 1 standard truck dim 13,6 m x 2,5 m + 1 trailer dim 13,4 m x 2,4 m x h=3 m + 1 trailer dim 13,5 m x 2,7 m x h=2,9 m (silos not included)

TECHNICAL FEATURES	UM	FAST 5000/3330	OPTIONAL	MANAGEMENT
Theoretical hourly output	m <sup>3</sup> /h	130*		
Aggregate storage	m <sup>3</sup>	65 +95		
Aggregate storage bins	n°	4		
Discharge gates/Pneumatic	n°	6/6		
Aggregate weighing hopper	m <sup>3</sup>	7		
Aggregate weighing system	kg	10000		
Cement weighing hopper	m <sup>3</sup>	2		
Cement weighing system	kg	2000		
Water weighing hopper	L	1000		
Extractor belt with 1000 mm sheet	m <sup>3</sup> /h	600		
Loading belt with 1000 mm sheet	m <sup>3</sup> /h	600		
Twin shaft mixer	L	5000/3350		
Air compressor	L	500		
Operating voltage	V	400		
Operating frequency	Hz	50/60		
Absorbed electrical power	hp/kW	313/230		
Installed electrical power	hp/kW	333/245**		

\* mixing time 30"; unloading time 35"  
\*\* basic version and for n.2 silos

All information and data shall be deemed purely indicative



On customer's request, Euromecc provides a range of accessories to complete the plant. In particular Fast 5000/3330 Venezia can be equipped with the following accessories:

1. Centralized greasing system
2. Washing system for the woven-wire
3. Washing system for mixer
4. Microwave probes
5. Stainless steel additives dosing system
6. Dust filtering system
7. Air-conditioned control cabin
8. Automation on PC
9. Winter or Summer configuration
10. Bulkheads for the loading ramp
11. Mobile concrete foundations for silos



The management of the plant is done through a control system which manages, automatically, the whole production cycle through a software easy, intuitive and completely adaptable to the user. The PC program can be provided in the main languages. The management system is equipped with all the parameters and functions in order to satisfy all customer's requirements and to improve the plant performance. The operation of the plant is represented with a coloured graphic on the monitor, also indicating all managed components.

